

352B是LFT用直接无捻粗纱，表面涂覆硅烷型浸润剂，适用于增强PA、TPU等多种树脂。

352B适用于LFT-G和LFT-D工艺，与基体树脂具有良好的相容性，广泛应用于汽车、电气电子、军工、通讯、运动器材等领域。

352B Direct Roving for LFT is coated with a silane-based sizing compatible with PA, TPU, and other resins.

352B is designed for LFT-G and LFT-D process. Its superior permeability with matrix resin makes it suited in automotive, electronic & electrical, military, telecommunication, construction, and sporting industry.

产品特点

- ◎ 毛羽少
- ◎ 与多种热塑性树脂具有良好的相容性
- ◎ 良好的使用工艺性能
- ◎ 优异的制品机械性能

Product Features

- ◎ Low fuzz
- ◎ Excellent compatibility with a multiple thermoplastic resin
- ◎ Good processing property
- ◎ Excellent mechanical property of the final composite product

规格代号 Identification:

玻璃类型 Glass Type	E	
浸润剂类型 Type of Size	硅烷 Silane	
浸润剂代号 Size Code	352B	
线密度(tex) Linear Density tex	1200	2400
纤维直径(um) Filament Diameter um	17	17




技术指标 Technical Parameters

线密度偏差 Linear Density (%)	含水率 Moisture Content (%)	可燃物含量 Size Content (%)
ISO 1889	ISO 3344	ISO 1887
± 5	≤ 0.10	0.35 ± 0.10

贮存 Storage

在没有特殊要求的情况下，玻璃纤维产品应贮存在干燥、凉爽的地方，防止受潮。建议保持室内温度平衡，最佳存储条件为温度-10℃~35℃,相对湿度≤80%。本产品12个月内使用最佳，使用前应保持在原包装内，为确保安全，避免损坏产品，托盘的堆码高度不应超过三层。当堆放两层或三层高时，要求正确地、平稳地移动上面的托盘。

Unless otherwise specified, the fiberglass products should be stored in a dry, cool and moisture-proof area. The fiberglass products should remain in their original package until prior to use. The room temperature and humidity should be always maintained at -10℃~35℃ and ≤80% respectively. To ensure safety and avoid damage to the product, the pallets should not be stacked more than three layers high. When the pallets are stacked in 2 or 3 layers, special care should be taken to correctly and smoothly move the top pallet.

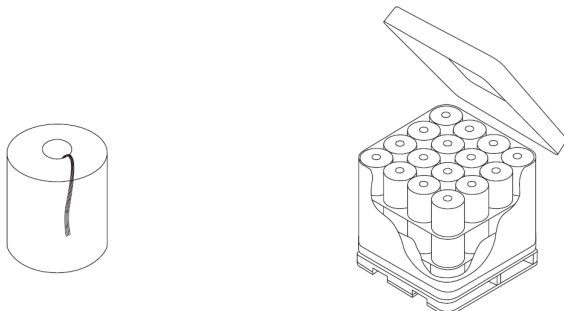

包装信息 Packaging

* 采用托盘包装或小纸箱包装

The product can be packed on pallet or in small cardboard boxes.

纱团高度 Package height mm (in)	260 (10)
纱团内经 Package inside diameter mm (in)	160 (6.3)
纱团外径 Package outside diameter mm (in)	270 (10.6)
纱团重量 Package weight kg (lb)	15.6 (34.5)

层数 Number of layers	3	4
每层纱团个数 Number of doffs per layer	16	
每托纱团个数 Number of doffs per pallet	48	64
每托重量 Net weight per pallet kg (lb)	750 (1653.4)	1000 (2204.6)

托盘长度 Pallet length mm (in)	1120 (44)	
托盘宽度 Pallet width mm (in)	1120 (44)	
托盘高度 Pallet height mm (in)	940 (37)	1200 (47)

中国巨石股份有限公司 CHINA JUSHI CO., LTD.

版权所有 © 巨石集团有限公司 巨石集团有限公司注册商标

地址: 浙江省桐乡经济开发区, 邮编: 314500 Add: Tongxiang Economic Development Zone, Zhejiang 314500, China

(国内销售 Domestic Sales) 电话Tel:+86-573-88181016 传真Fax:+86-573-88136248

(国际销售 International Sales) 电话Tel:+86-573-88136318 传真Fax:+86-573-88181058

(客户服务 Customer Service) 电话Tel:+86-573-88136325 传真Fax:+86-573-88136248

http://www.jushi.com E-mail: info@jushi.com